



SF4 Catalogue



Document version: v4.00

The ISAW sensors are robust, high performance, zero-maintenance sensors ideal for a wide range of applications.

This catalogue lists all SandFlow sensor equipment. For more information about the specifications and operation of the sensors, please refer to the User Guide available at www.isaw-products.com.

The articles and dimensions described in this catalogue may be subject to change.

IAV Technologies SARL

ISAW Products Division
Chemin des Couleuvres 4A, 1295 Tannay, Switzerland
Tel: +41 (0)22 960 11 04
E-mail: isaw@iav.ch

www.isaw-products.com



© IAV Technologies

Table of contents

SandFlow Sensor.....	4
SandFlow Sets.....	5
SFBRA – SandFlow sensor with mounting kit.....	5
SF2MA – Pair of SandFlow sensors fastened on a tripod mast.....	6
SandFlow Accessories	7
C2BRA – Mounting kit	7
TMAST – Tripod mast	8
UDONG – USB Link accessory.....	9
MOBUS – Modbus Adapter	9
EXT10 – Cable extension, 10 meters	10
SandFlow Mounting Instructions.....	11
SandFlow SF4 cable	11
SFBRA Mounting instructions.....	13
SF2MA Mounting instructions.....	14
TMAST Package content.....	15
TMAST Mounting instructions.....	16
Mounting Examples	17
Interfacing Examples.....	18
Spare parts	19

SANDFLOW SENSOR

SF4

SandFlow



Note: Factory cable length: 5 m

The SandFlow SF4 sensor is an ultra-robust instrument measuring solid particle flux intensity and wind speed.

- Low-power omni-directional instrument with no mobile parts (totally sealed acoustic instrument)
- Corrosion free and resistant to the most extreme conditions and environments
- Plug-and-Play, user-configurable intelligent sensor
- Analog outputs and digital communication
- Can be connected to almost any external central unit or peripheral
- Supports SDI-12, Modbus RTU RS485, and IoT compatible (internal processing and memory)
- Swiss made

Typical applications

- Meteorology (blowing sand, sandstorms, lithometeors)
- Roadside, railway, airport protection
- Building and infrastructure surveillance and insurance
- Land management
- Applied scientific research


For more information about the sensors and their configuration, please refer to the **User Guide** available on www.isaw-products.com.


SANDFLOW SETS

The SandFlow SF4 sensor is available in the following configurations:

ORDER REF.	Description	Set content			
		Sensor SF4	Mounting kit	Tripod mast	USB dongle
SFBRA	SandFlow sensor with mounting kit	1	1		1
SF2MA	Pair of SandFlow sensors fastened on a tripod mast	2	2	1	2



SFBRA – SandFlow sensor with mounting kit



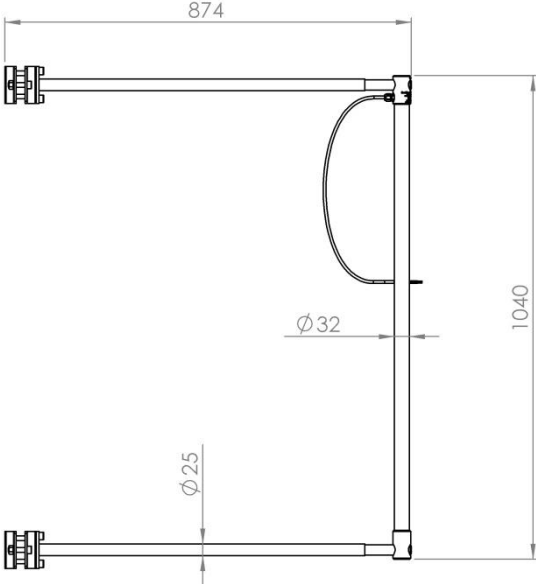

Note: Factory cable length: 5 m

All dimensions are in mm

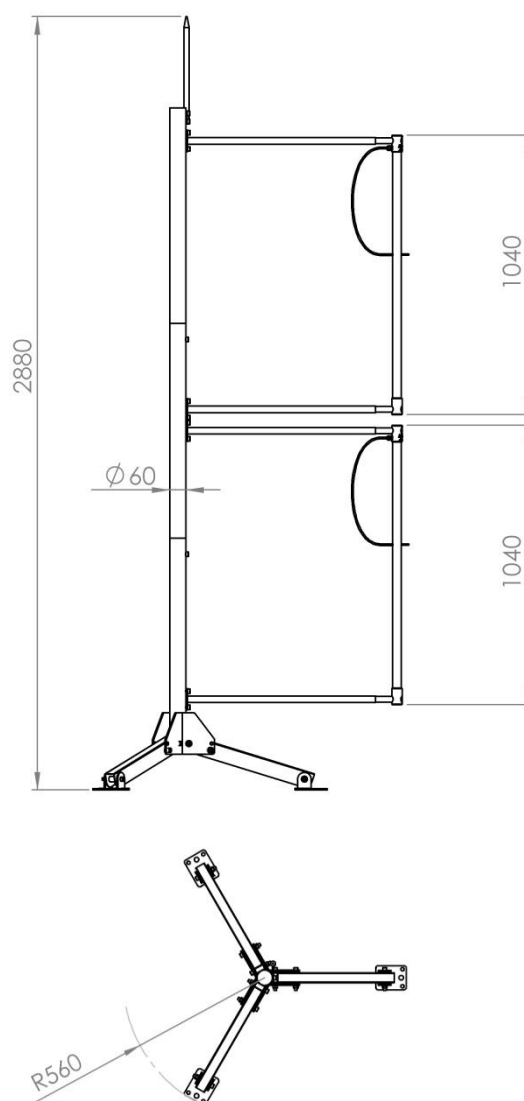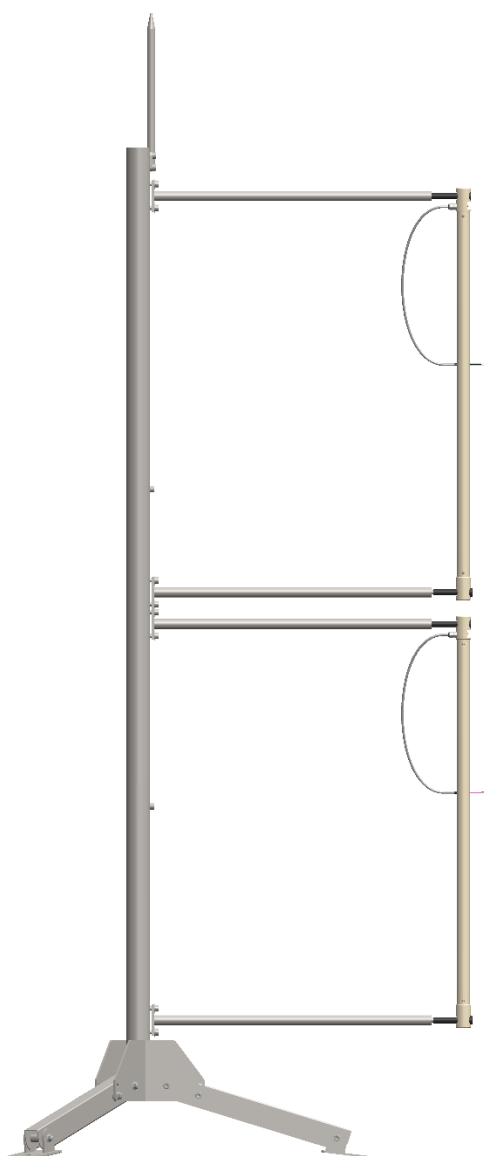SF2MA – Pair of SandFlow sensors fastened on a tripod mast

Note: Factory cable length: 5 m


All dimensions are in mm

SANDFLOW ACCESSORIES


Available accessories:

REF.	Description	Can be ordered separately
C2BRA	Mounting kit (included in SFBRA)	
TMAST	Tripod mast (included in SF2MA)	•
UDONG	USB link accessory (provided with each SF4 sensor)	
MOBUS	Modbus adapter	•
EXT10	Extension cable, 10 meters	•

C2BRA – Mounting kit

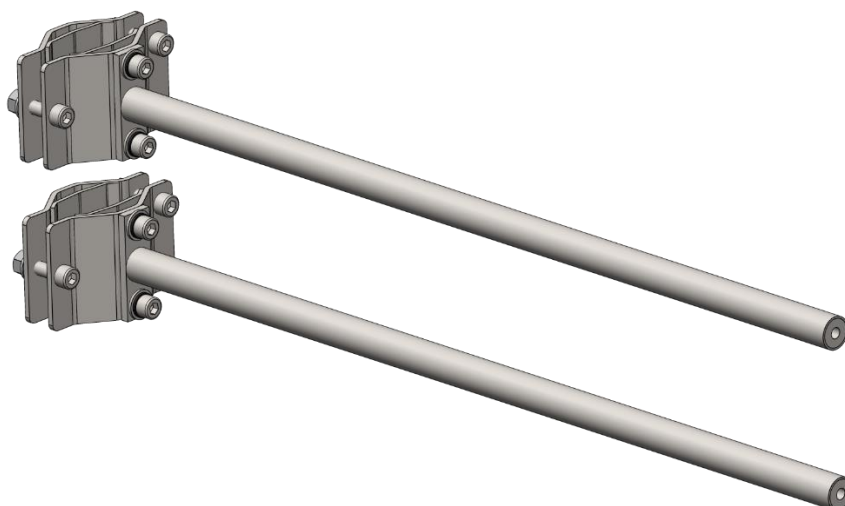



The FC4 mounting kit is composed of 2 cylindrical arms fastened to V brackets adaptable to a mast of outer diameter between 16 and 86 mm.

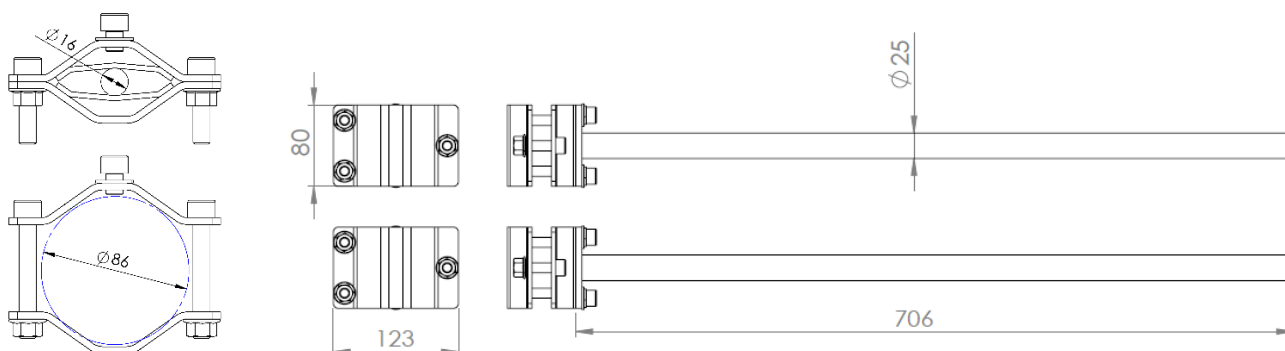

Note: All screw threads are M10.

All dimensions are in mm

TMAST – Tripod mast

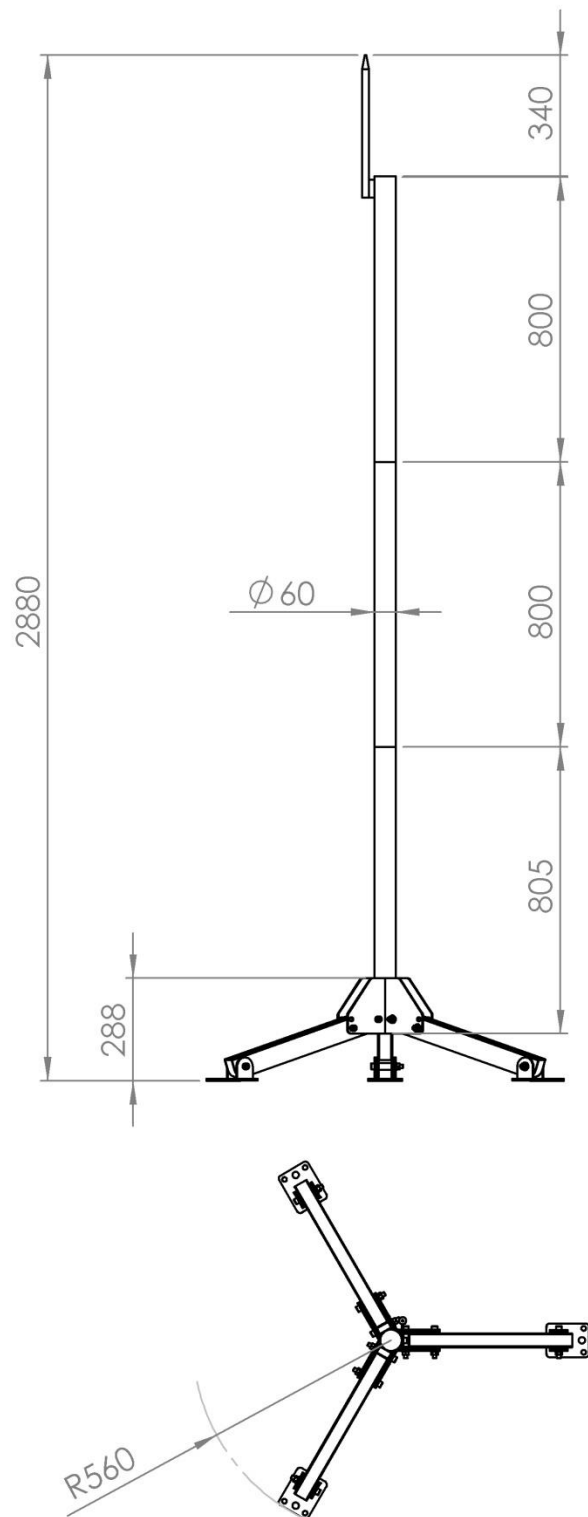
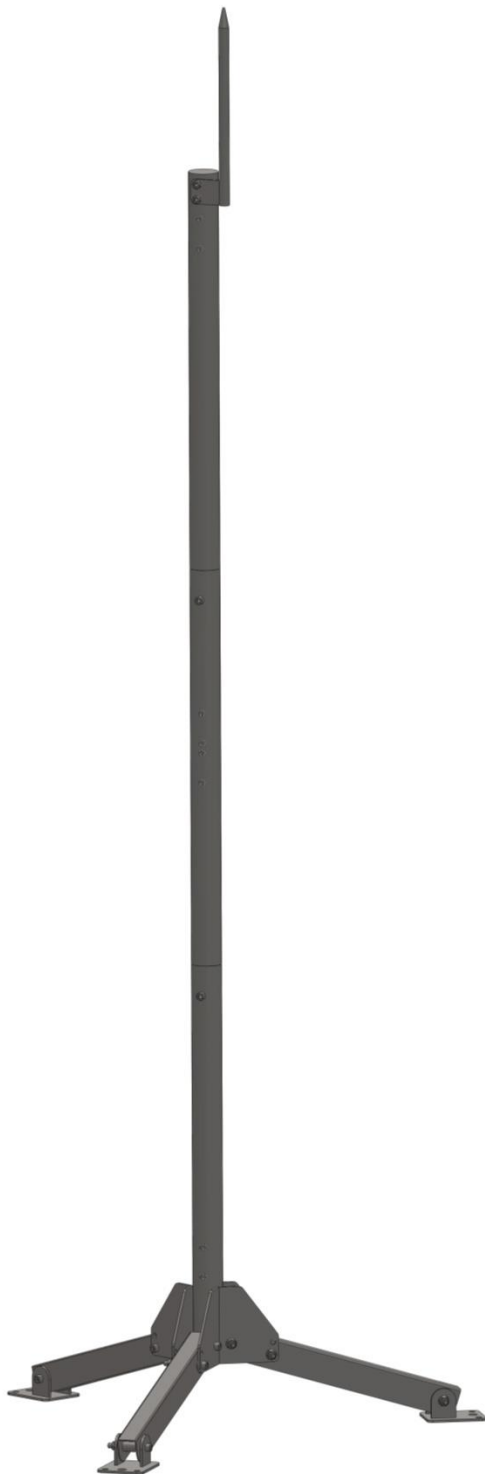


TMAST is a lightweight, robust, cost-effective and universal stainless steel tripod mast that is easily transportable. It allows all the usual ISAW sensor mountings, as well as supporting additional sensors or all other accessories or auxiliary equipment.

The mast is dismountable (3 parts) and equipped with 3 tiltable legs and a lightning rod.

All dimensions are in mm




UDONG – USB Link accessory

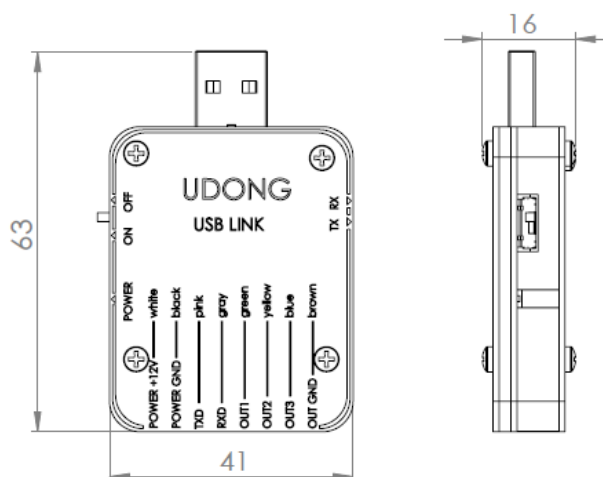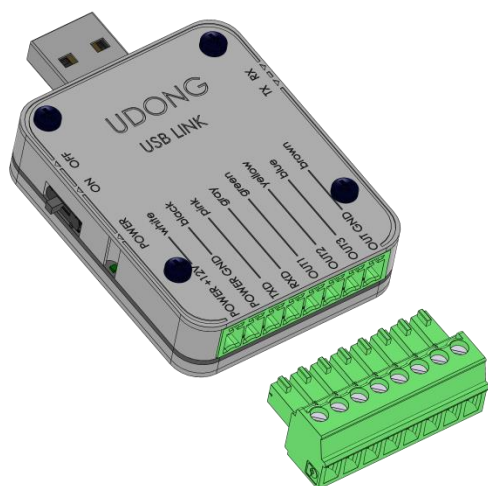

The USB link dongle (UDONG), provided with the sensors, is a direct physical connection accessory from the sensor to a USB port. It enables the sensor's power supply and the immediate use of all the software features of the ISAW-TOOLBOX freeware. The USB dongle is generic and can thus be used or interchanged with all ISAW sensors.

All dimensions are in mm



MOBUS – Modbus Adapter

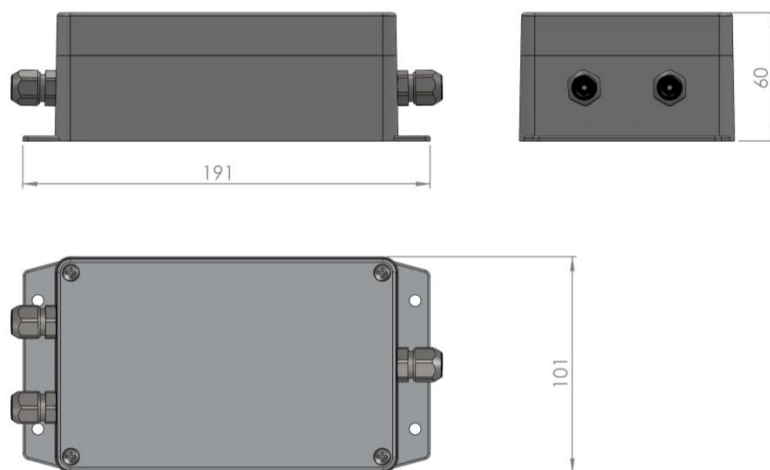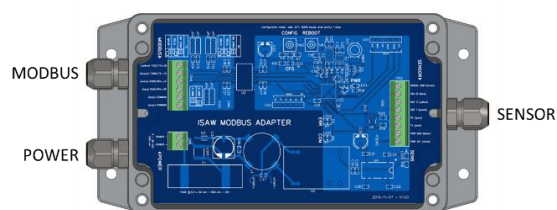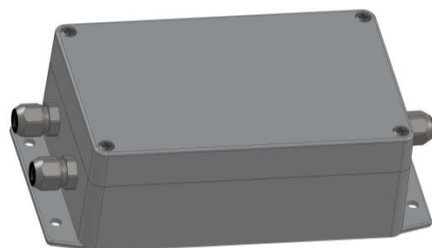

The ISAW Modbus RTU RS485 Adapter (MOBUS) enables the power supply and connection of any ISAW sensor to a Modbus network. MOBUS is the recommended accessory to interconnect the sensor through the open serial Modbus RTU (RS-485) protocol based on a master/slave or client/server architecture. The fieldbus environment is the base level group of digital networks in the hierarchy of plant networks.

All dimensions are in mm

EXT10 – Cable extension, 10 meters

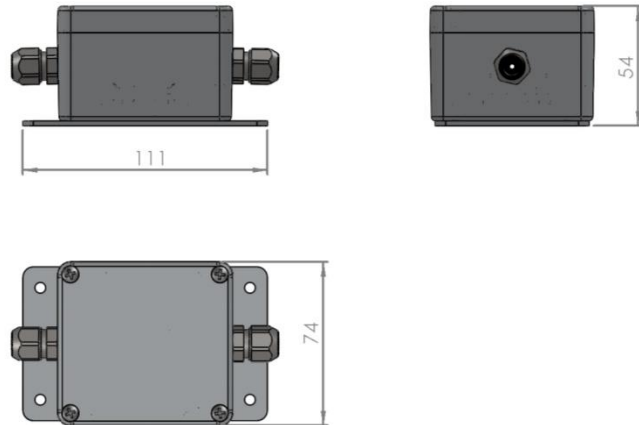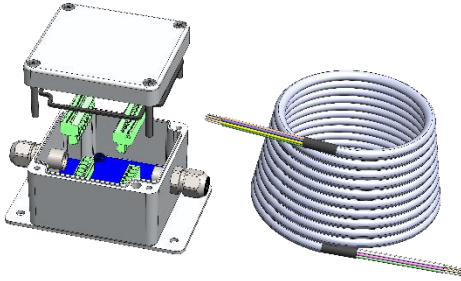

Each sensor is delivered with a 5 m cable (see specifications on page 11). Use one or several EXT10 cable extensions to extend this default length up to typically 200 m.

EXT10 is a 10 meters extension of the sensor cable. It is equipped at one end with an IP68 aluminum enclosure junction box, which contains an 8-pin screw connector to connect any ISAW sensor or chaining several EXT10 extension cables.

All dimensions are in mm

SANDFLOW MOUNTING INSTRUCTIONS

- SandFlow SF4 cable
- SandFlow Sets package content
- SFBRA Mounting instructions
- SF2MA Mounting instructions
- TMAST Package content (for SF2MA only)
- TMAST Mounting instructions (for SF2MA only)

SandFlow SF4 cable















Each sensor is delivered with a **5 m cable** prepared with bootlace ferrules at each of its 8 conducting wires, ready to be plugged into the 8-pin screw terminals of the ISAW accessories or any other terminal of your choice.

The cable is a **LÜTZE SUPERFLEX® TRONIC (C) PUR 7×0.25**, ref. 117103, with 7 conductors AWS 24 / 0.25 mm²). The 8th conductor (color: BLACK) is a 10 cm length termination welded on the shield.

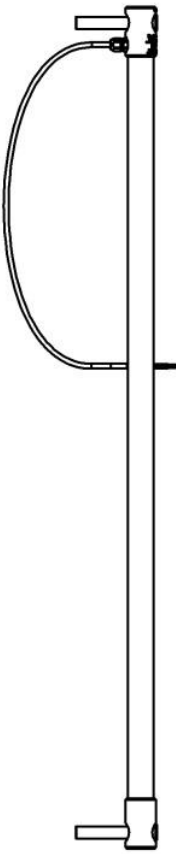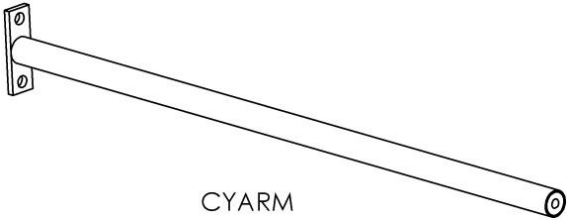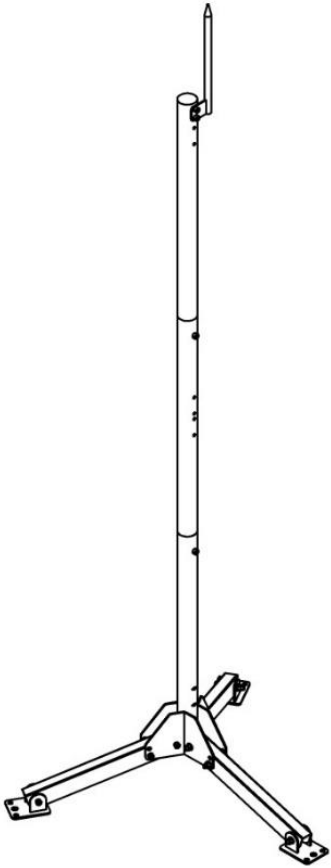
WARNING: It is strongly advised **not to shorten the factory cable**. Should you be obliged to, you must absolutely treat the shield as the BLACK (POWER GND) conductor, that is, protect the nude shield with a black thermo sleeve, crimp a terminal, and make sure to connect it to the GND of your connected device.

SandFlow sets Package content

Item ref.	Description	Quantity	
		SFBRA	SF2MA
SF4	SF4 SandFlow sensor	1	2
UDONG	USB dongle	1	1
UDONG	USB dongle	1	1
CYARM	Cylindrical arm	2	4
BRACF	Front bracket	2	
BRACB	Back bracket	2	
BRASH	Reduction shim	4	
SLEEVE	Plastic sleeve	2	4
BN 611 M10x110	M10 × 110 mm screw	2	4
BN 611 M10x70	M10 × 70 mm screw	6	
BN 610 M10x40	M10 × 40 mm screw	6	
BN 610 M10x12	M10 × 12 mm screw	4	8
BN 10342 M10x25x1.5	M10 washer 1.5 mm thick	4	8
BN 33010 M10	M10 securing nut	6	
TMAST	Tripod mast (see TMAST Package content)		1


Sensor	Mounting kit	Tripod mast
 <p>SF4</p>	 <p>CYARM</p>	 <p>TMAST</p>
	<div>Bracket kit</div> <div>    <p>BRACF BRACB BRASH</p> </div> <div>USB dongle</div> <div>  <p>UDONG</p> </div>	
	<div>Screw kit</div> <div>      <p>BN 611 M10x110 BN 611 M10x70 BN 610 M10x40 BN 610 M10x12 SLEEVE</p> <p>x 4 x 6 x 4 x 4 x 4</p> <p>BN 10342 M10x25x1.5 BN 33010 M10</p> <p>x 4 x 6</p> </div>	

SFBRA Mounting instructions

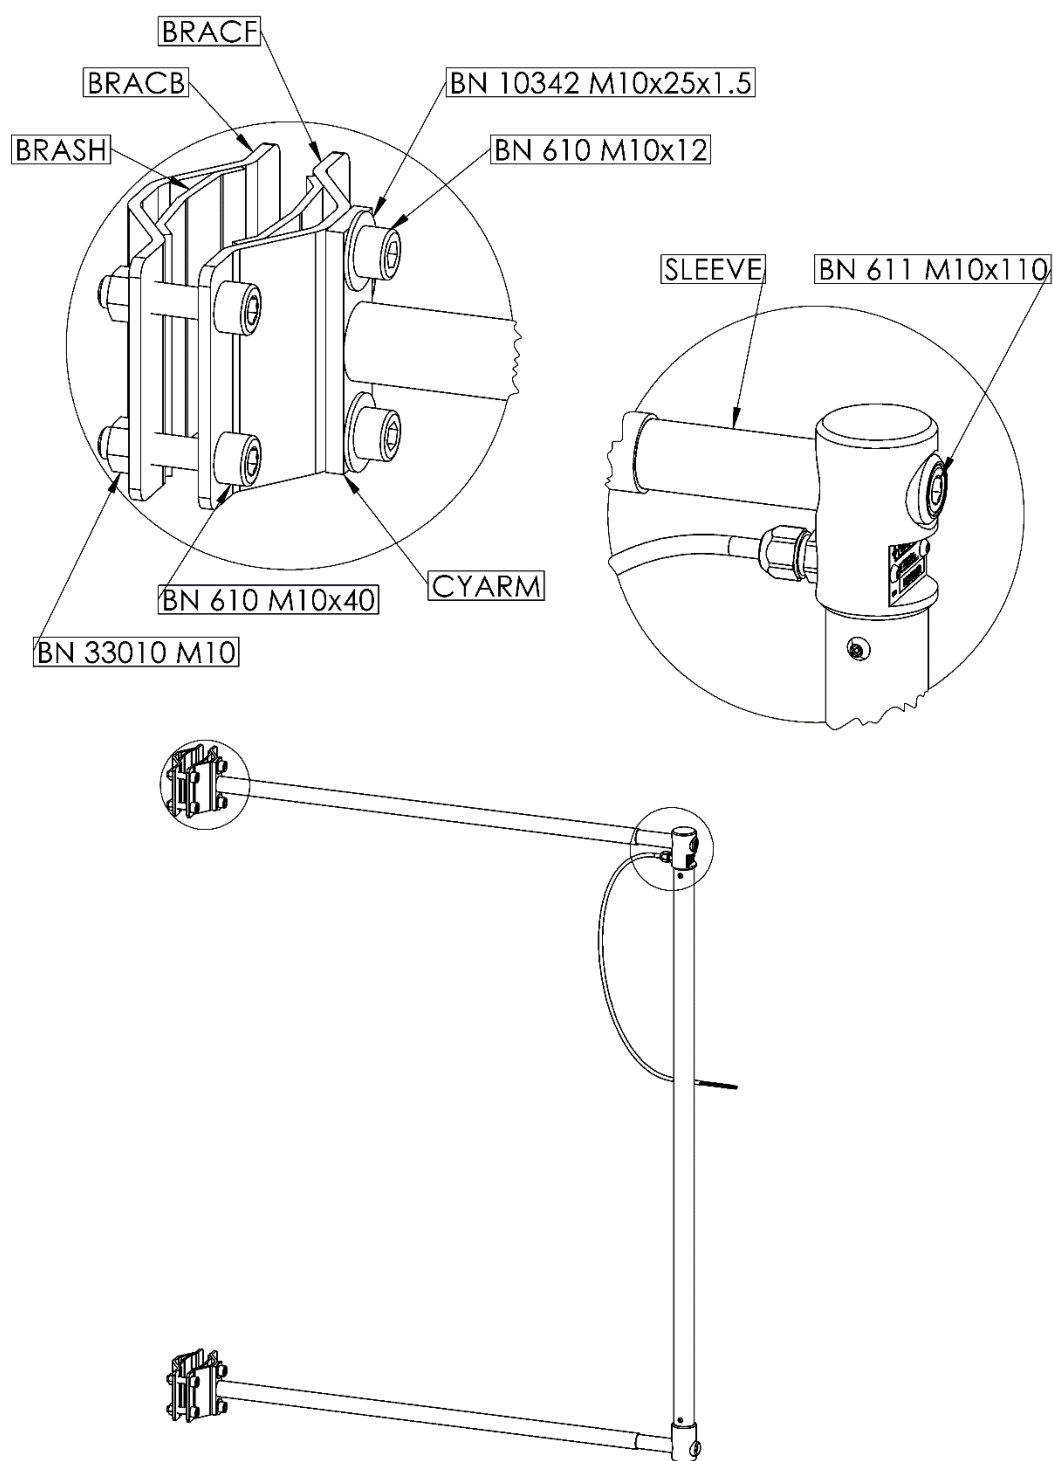

- Always mount the **SENSOR HEAD** (end with cable) **ON TOP**.
- For a **MAST OF OUTER DIAMETER ≥ 60 mm**, replace the screws BN 610 M10X40 with BN 611 M10X70.
- For a **MAST OF OUTER DIAMETER ≥ 65 mm**, remove the reduction shims (BRASH).
- To fasten the sensor on a **FLAT SURFACE**, screw the front brackets (BRACF) directly onto the surface.
- The sensor's cable must be **tightly secured** to the arm and mast using tie wraps.

SF2MA Mounting instructions

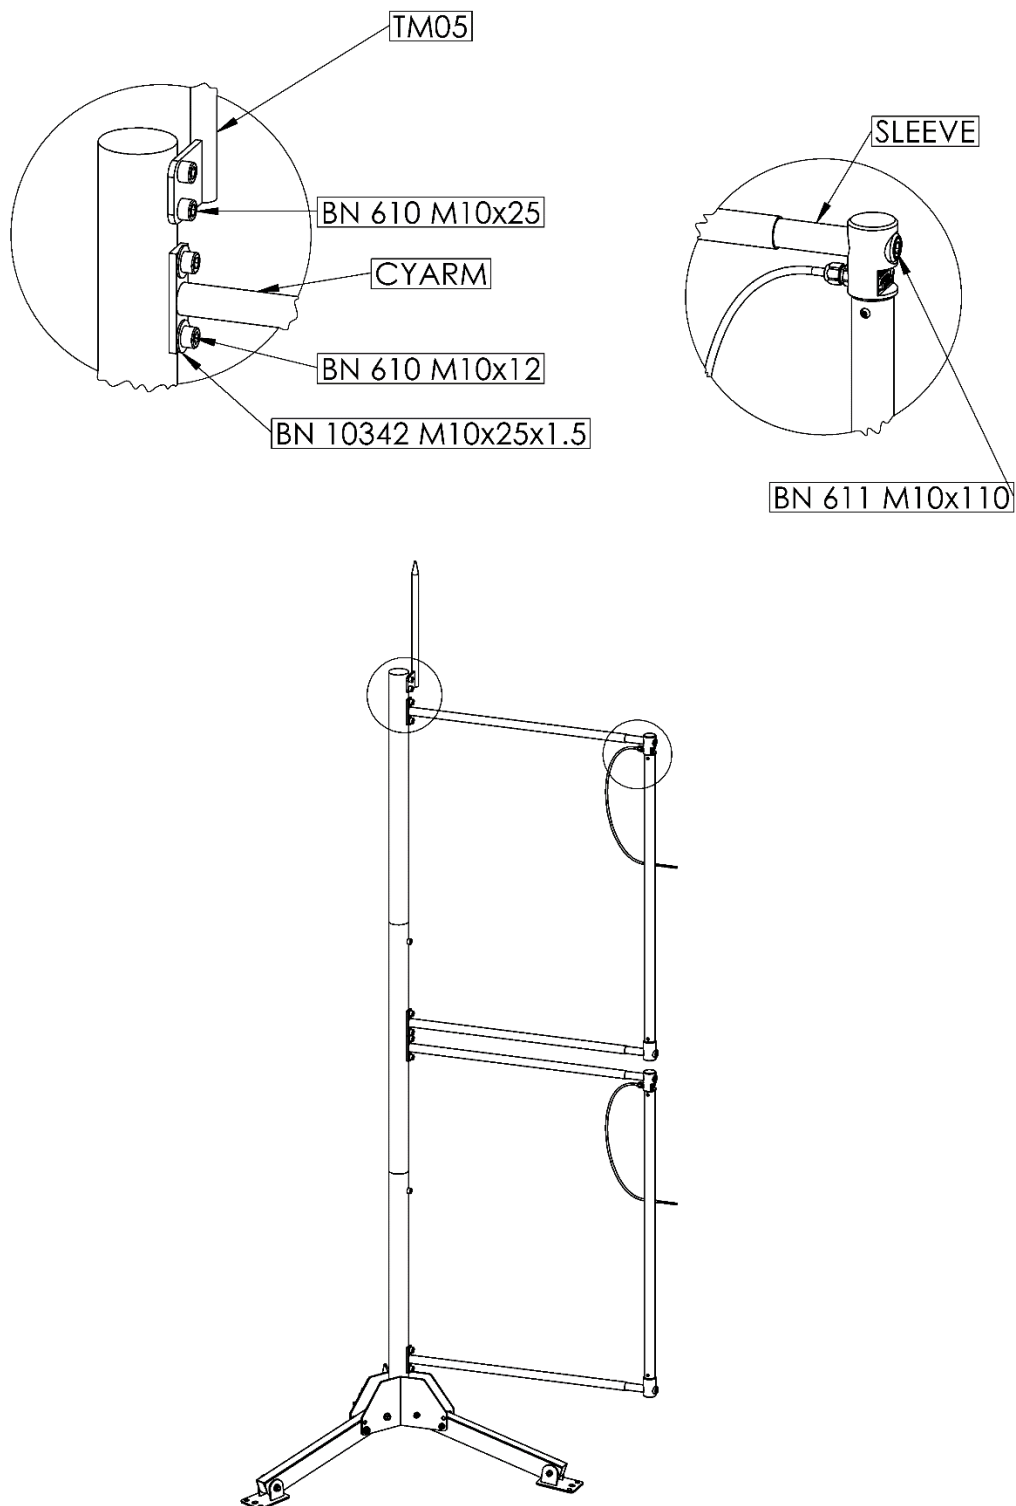

- See **TMAST Mounting Instructions** to assemble the tripod mast (TMAST).
- Always mount the **SENSOR HEAD** (end with cable) **ON TOP**.
- The sensor's cable must be **tightly secured** to the arm and mast using tie wraps.


TMAST Package content

Ref.	Description	Quantity
TM01	Leg with inclinable foot	3
TM02	Base tube	1
TM03	Mid tube	1
TM04	Top tube	1
TM05	Lightning rod	1
BN 610 M10x25	M10 × 25 mm screw	4
BN 611 M10x70	M10 × 70 mm screw	9
BN 13289 M10x25x4	M10 washer 4 mm thick	9
BN 33010 M10	M10 securing nut	9


Mast kit



TM01
x 3

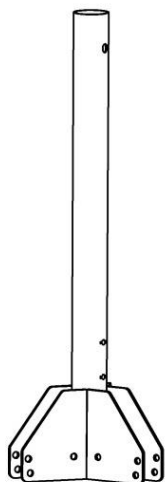

TM02
x 1



TM03
x 1



TM04
x 1



TM05
x 1

Screw kit

BN 611 M10x70



x 9

BN 610 M10x25



x 4

BN 13289 M10x25x4









x 9

BN 33010 M10




x 9


TMAST Mounting instructions

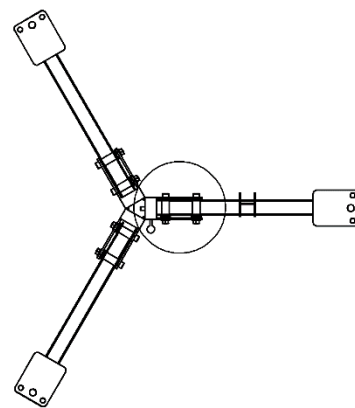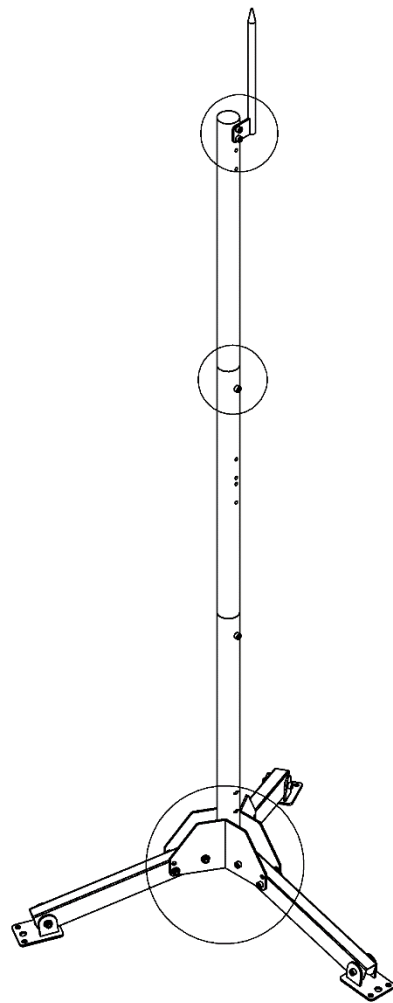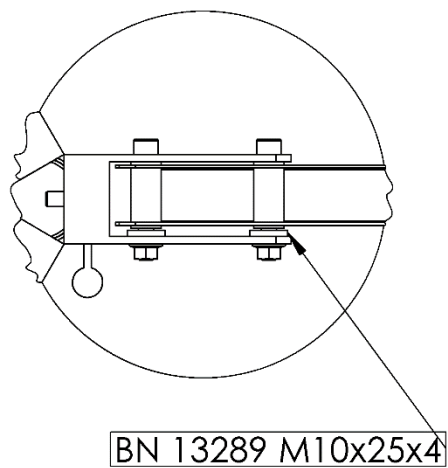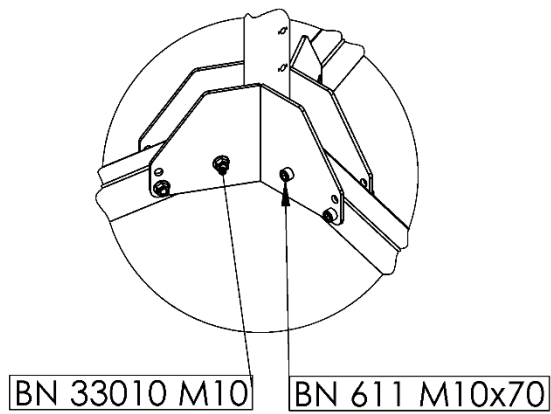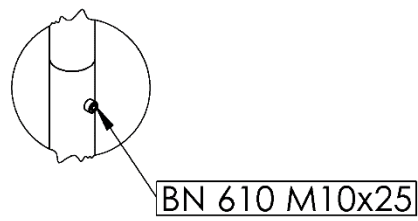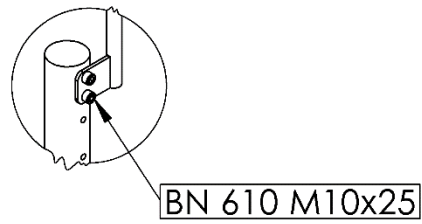


MOUNTING EXAMPLES

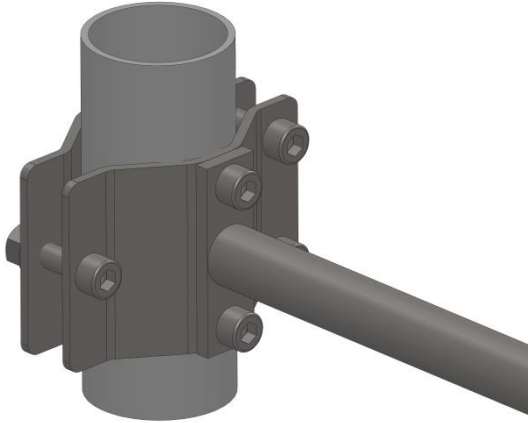

On a vertical, horizontal (or oblique) **cylindrical mast** with an outer diameter of **40 mm**, use the provided V brackets.

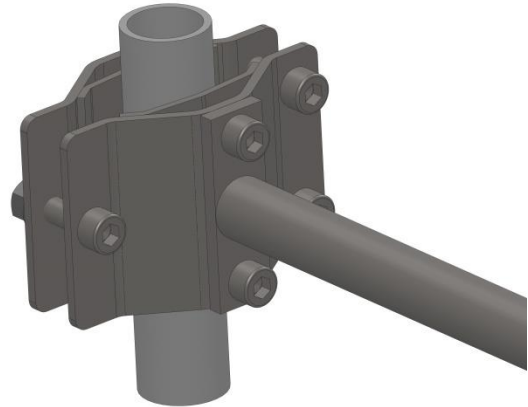


On a vertical, horizontal (or oblique) **cylindrical mast** with an outer diameter of **25 mm**, use the provided V brackets and reduction shims.

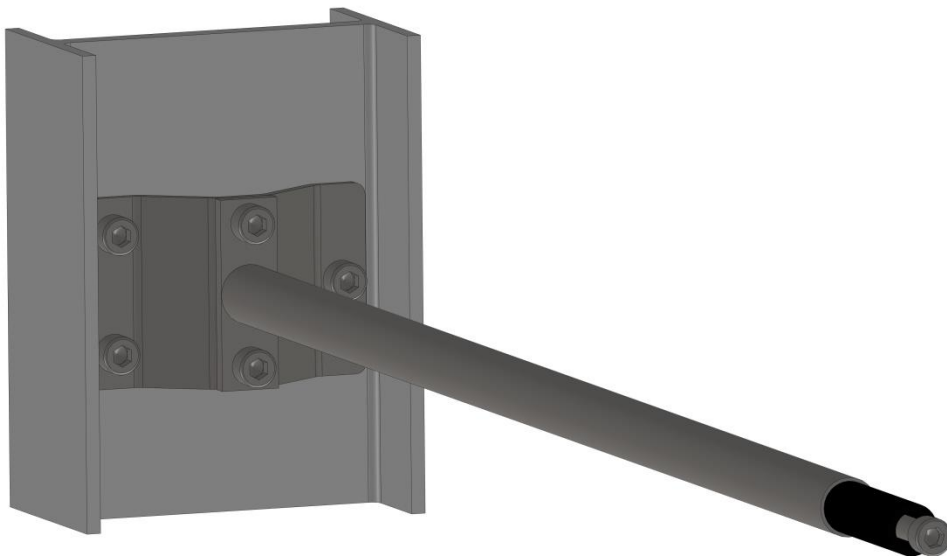





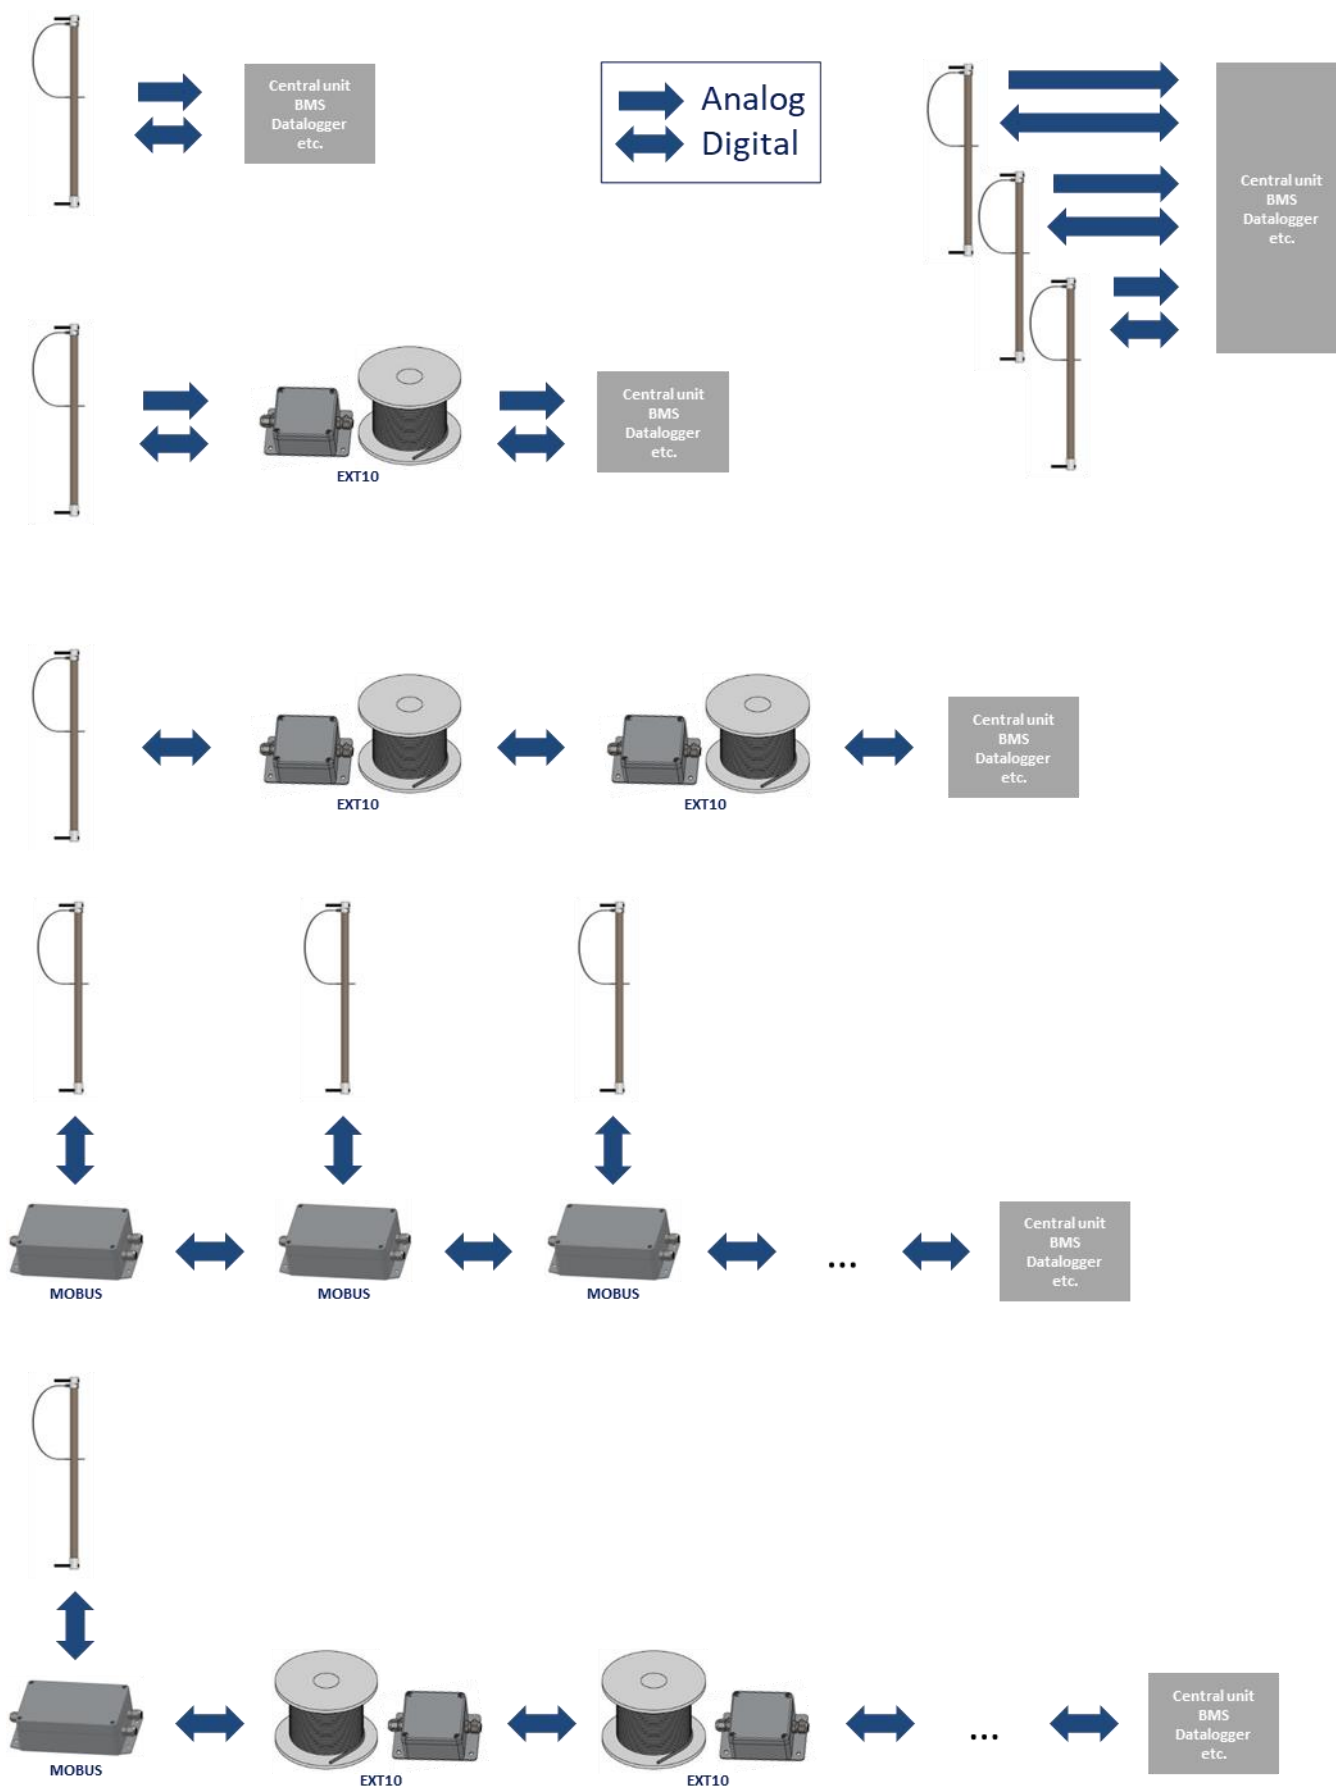













On a **flat surface**, screw the V brackets (or the arm directly) onto the surface.

INTERFACING EXAMPLES



SPARE PARTS

	Item ref.	Short name		Full description	Quantity					
					HFBR	FC2MA	UDONG	MOBUS	EXT10	TMAST
Sensor	SF4	SandFlow sensor		ISAW - SandFlow SF4 sensor	1	2				
Mounting parts	CYARM	Cylindrical arm		ISAW - Cylindrical arm	2	4				
	SLEEVE	Cylinder sleeve		ISAW - Plastic sleeve for sensor	2	4				
	BRACF	Front bracket		ISAW - Front bracket for cylindrical arm	1					
	BRACB	Back bracket		ISAW - Back bracket for cylindrical arm	1					
	BRASH	Reduction shim		ISAW - Reduction shim	2					
Mast	TM01	Leg with inclinable foot		Leg with inclinable foot for supporting structure TMAST		3				3
	TM02	Base		Base for supporting structure TMAST		1				1
	TM03	Mid tube		Mid tube for supporting structure TMAST		1				1
	TM04	Top tube		Top tube for supporting structure TMAST		1				1
	TM05	Lightning rod		Lightning rod for supporting structure TMAST		1				1
Acc.	JUBOX	Junction box		Junction box for cable extension EXT10					1	

Item ref.		Short name		Full description	Quantity					
					HFBR	FC2MA	UDONG	MOBUS	EXT10	TWAST
Standard	BN 610 M10x12	M10 × 12 mm screw		Hex socket head cap screws fully threaded (DIN 912, ISO 4762), stainless steel A2, M10x12 (e.g., Bossard BN 610 Art. No. 3210794)		8				
	BN 610 M10x25	M10 × 25 mm screw		Hex socket head cap screws fully threaded (DIN 912, ISO 4762), stainless steel A2, M10x25 (e.g., Bossard BN 610 Art. No. 1233505)		4				4
	BN 610 M10x40	M10 × 40 mm screw		Hex socket head cap screws fully threaded (DIN 912, ISO 4762), stainless steel A2, M10x40 (e.g., Bossard BN 610 Art. No. 1032860)	2					
	BN 611 M10x70	M10 × 70 mm screw		Hex socket head cap screws partially threaded (DIN 912, ISO 4762), stainless steel A2, M10x70 (e.g., Bossard BN 611 Art. No. 1113356)	2	9				9
	BN 611 M10x110	M10 × 110 mm screw		Hex socket head cap screws partially threaded (DIN 912, ISO 4762), stainless steel A2, M10x110 (e.g., Bossard BN 611 Art. No. 1488759)		4				
	BN 10342 M10x25x1.5	M10 washer 1.5 mm thick		Flat washers without chamfer, large outside diameter, stainless steel A2, M10/10.5/25/1.54 (e.g., Bossard BN 10342 Art. No. 3061838)		8				
	BN 13289 M10x25x4	M10 washer 4 mm thick		Flat washers without chamfer, for bolts with heavy duty type spring pins (DIN 7349), A2, M10/10.5/25/4 (e.g., Bossard BN 13289 Art. No. 3062099)	7	9				9
	BN 33010 M10	M10 securing nut		Hex flange nuts (DIN 6923; EN 1661), stainless steel A2, M10 (e.g., Bossard BN 14476 Art. No. 1329359)	7	9				9
	TERM BLOCK PLUG 8POS STR 5.08MM	Terminal block plug		8 Position Terminal Block Plug, Male Pins 0.200" (5.08mm) 180° Free Hanging (In-Line) (e.g., On Shore Technology Inc. Art. No. OSTV8085150)					2	